


Qteq provides surface cables tailored for use with analogue and digital downhole pressure gauges. Each cable configuration complies with relevant regulatory certification requirements and client-specific specifications.

Our single core downhole gauge systems require use of an armoured single pair conductor surface cable, terminated in compound-filled barrier glands at the junction box on the wellhead.

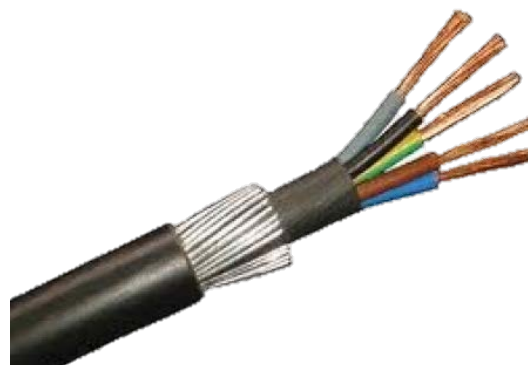

Features and Benefits

- Application specific component selection.
- Meets regulatory requirements.
- Suits WHO components.
- Simple installation.

Specifications

	Analogue (Ex ia)	Digital (Ex d)
Cable Gland	Industrial or HA per client specification	Peppers Gland CR-CBR/20/M20
Cable Gland Certification	IP Rated	Ex d
Surface Cable Colour	Blue	Black
Surface Cable Armour	SWA	SWA
Surface Cable Pairing	Minimum 1x pair	Minimum 1x pair